





Material and coating	
insulating medium	Glass fiber reinforced PPS, UL94-V0 radiation resistance, no moisture absorption, ozone resistance
contact	Copper alloy nickel base plating
attachment	stainless steel
Electricity indicator	
Pressure test (sea level)	1000V AC/DC
nsulation resistance test	≥1000MΩ
Contact	Signal contacts: working current 25 ℃, ≤3A;working current 85 ℃, ≤2.2A; contact resistance ≤10mΩ
Mechanical properties index	
Mechanical life	500 cycles
Environmental Performance Indicators	
Working temperature	-55℃~125℃

Part number :
22 1 V nn Fxx

22 series
Category code
1---Socket
2---plug
Type of contact
V---Horizontal welding plate

LF number of contacts

Attachment combination code
F26---M2 thread lock, hex nut horizontal installation
F23---M2 thread lock, slotted nut horizontal installation

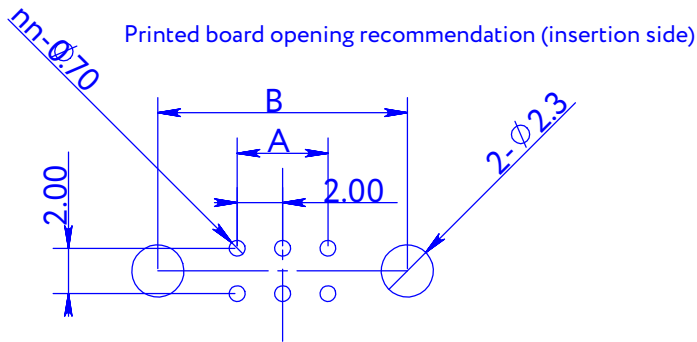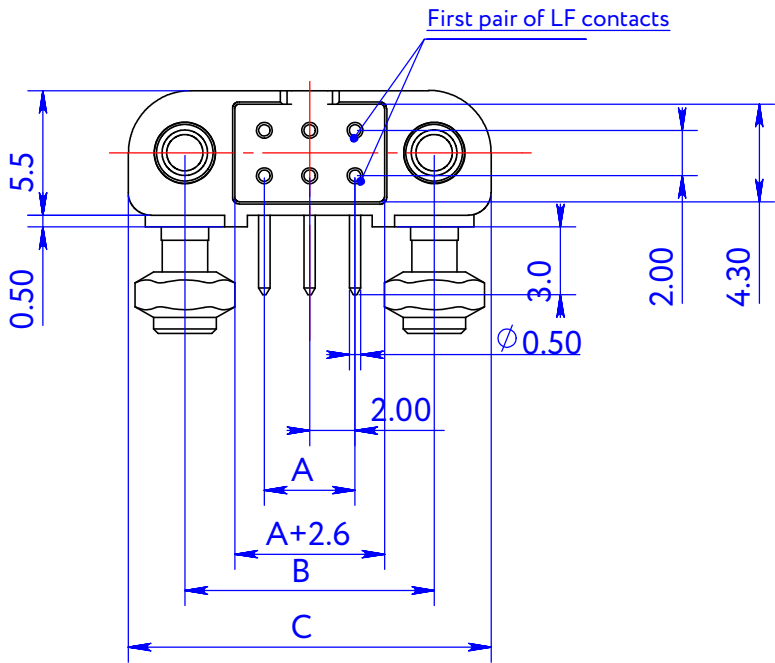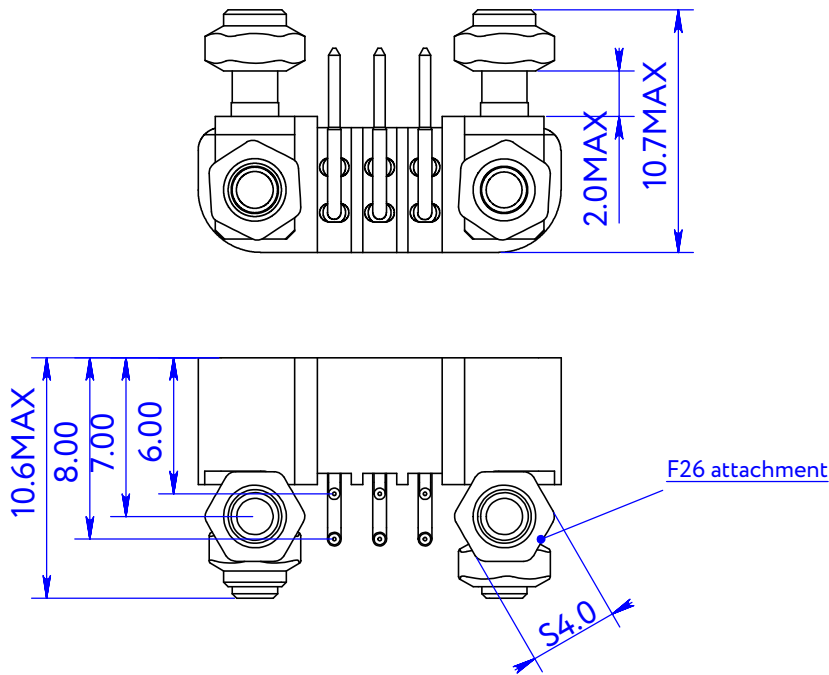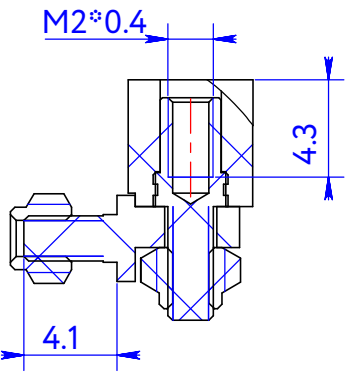

A=nn-2
B=A+7
C=A+12

未注公差	制图	2023年8月15日
x.=±0.2mm	审核	
x.x=±0.1mm		
x.xx=±0.05mm		
角度=±2°	批准	

Plastic shell horizontal solder plate socket			 MATENG
SPECIFICATION			
单位: mm		比例	MTNG-221VnnF26
		3:1	
共 1 张		第 1 张	