
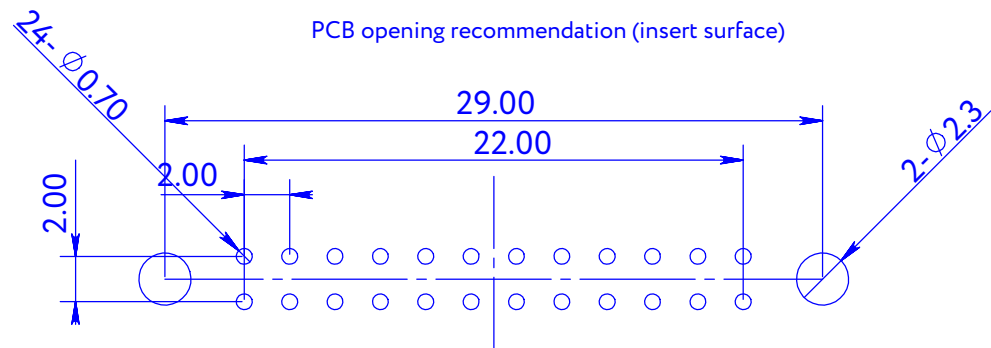
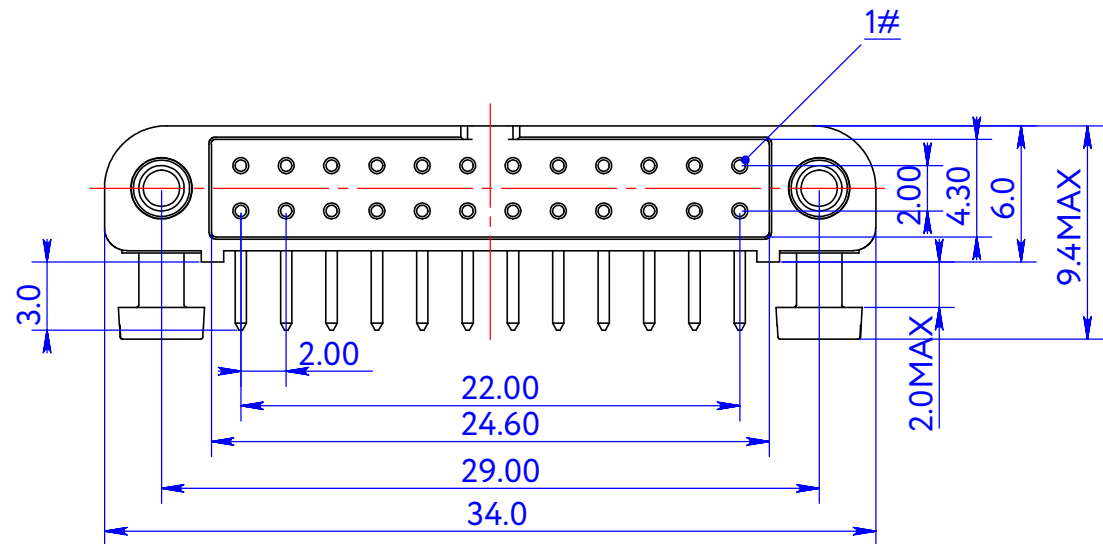


Material and coating	
Insulating medium	Glass fiber reinforced PPS,UL94-V0 is radiation resistant, non-moisture absorbing and ozone resistant
Contact	LF contact: Copper alloy nickel base gold plating
Accessory	Stainless steel
Electrical performance index	
Pressure test (sea level)	1200V AC/DC
Insulation resistance test	≥1000MΩ
Contact	Signal contact: working current 25℃,≤3A; Working current 85℃, ≤2.2A; Contact resistance ≤10mΩ
Mechanical performance index	
Mechanical life	500 cycles
Environmental performance index	
Working temperature	-55℃~450℃

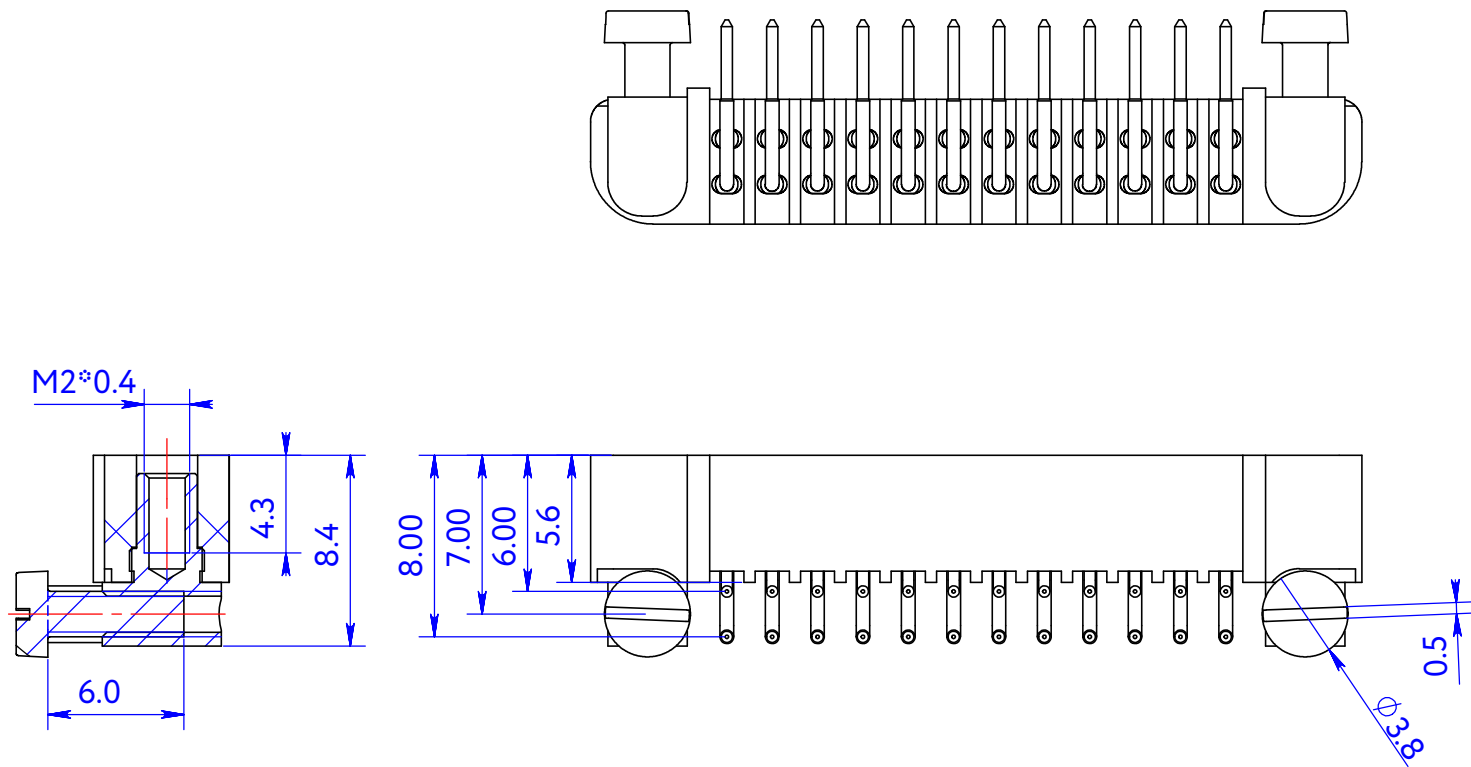

未注公差	制图	2023年10月25日
x.=±0.2mm	审核	
x.x=±0.1mm		
x.xx=±0.05mm		
角度=±2°	批准	

Horizontal welded
plate socket with
plastic housing

SPECIFICATION

单位: mm	比例
3:1	
共 1 张	第 1 张



MATENG

M80-5402405